

LEHNER OilTiger®

12 Volt spreader for spreading oil binding agents

The spreader takes over dangerous manual work on busy roads

- Continuous regulation of spreading width between 0.5 and 2 metres
- 12/24 volt power supply (adapter required for 24V)
- Controlled via panel in cab
- Easily mountable on all vehicle types
- Translucent hopper with 105 litre capacity and a run off
- Slide and spreading disk made from stainless steel
- Suitable for all oil binding agents

OILTIGER



The spreader takes over dangerous manual work

OilTiger® makes distributing oil binding agents by hand a thing of the past and removes personnel and emergency services off dangerous and busy roads. It also significantly reduces the time needed to apply the oil binding agents. The spreading profile is even and exact. As a result, the oil binding agents can immediately begin absorbing over a large area.



LEHNER

Environmentally sound Economically prudent

Mechanised spreading keeps oil binding agents consumption down to a minimum. This greatly reduces material and disposal costs.

Front and rear assembly on all vehicles

The **OilTiger®** can be mounted on the front or rear of all vehicles. Drill holes for easy assembly are located on the reverse side of the frame.

Fully controllable from the cab

The driver operates all controls from the cab:

- Spreading disk On/Off
- Slide Open/Close
- RPM

The driver can use the spreading disk's continuous RPM control to adjust the spreading width between 0.5 and 2 metres during the operation.



Dosage slide

The dosage slide can be used to continuously adjust the amount of material to be spread.

Vibrator


OilTiger® can be equipped with an vibrator to handle oil binding agents that does not flow readily. This guarantees a continuous even spread (extra charge).

Strike point adjustment

The position where the material strikes the spreading disk can be adjusted in order to distribute different oil binding agents evenly.

Driven by a 12 volt power supply, available in all vehicles

The spreader is driven by a 12 Volt supply provided by the emergency vehicle. The 24 Volt supply requires an adapter.

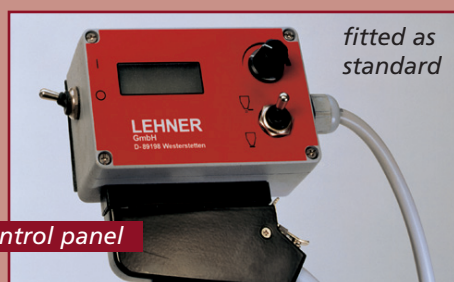

Small and easy to handle

The whole unit weights just 29 kg. Dimensions, L x W x H
610 x 485 x 1085
The translucent hopper has a capacity of 105 litres. This can supply a distance of up to 1,100 m.

Accessories:

Thanks to its rapid coupling system, **OilTiger®** can be mounted onto the vehicle within 30 seconds. It is immediately ready for use.

Front tow bar bracket



Holding device for the tailboard



LEHNER OilTiger®

-The revolution in spreading oil-binding agents!

LEHNER GmbH
Haeuslesaecker 5 - 9
D-89198 Westerstetten

Tel: 0049 7348/95 96 0
Fax: 0049 7348/95 96 40

<http://www.lehner.tv>
E-mail: info@lehner.tv